



**ORDERING INFORMATION
MIL 5015
BAYONET COUPLING CONNECTORS**

03 9585 1311

sales@connectorworld.com.au


www.connectorworld.com.au

MIL 5015 BAYONET COUPLING CONNECTORS

Reverse bayonet locking connectors, are basically MIL 5015 type, but with a quarter turn bayonet lock for quick positive coupling. Designed for harsh environmental conditions, high vibration and to be water proof.

*** Same insert configuration and dimensions as standard 5015 connectors.

ORDERING INFORMATION

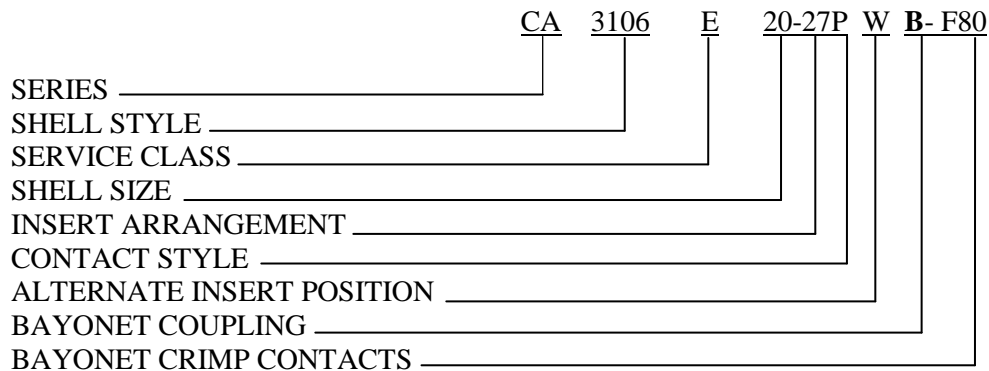

SHELL STYLE:

- 3100 Wall mounting receptacle
- 3101 Cable mounting receptacle
- 3102 Box mounting receptacle
- 3106 Straight plug
- 3108 90° angle plug

SERVICE CLASS: DESCRIPTION:

- E. Resilient insulator and integral cable clamp
- F. Same as E with O ring seal under coupling nut
- R: Same as F with shortened endbell

CONTACT STYLE:

- P Pin male
- S Socket female

MATERIAL & FINISH

- Shell Aluminium Alloy
- Finish Drab olive chromate over cadmium plating
- Insulator Neoprene Rubber
- Contacts Brass on copper alloy
- Finish Silver plate
- Termination Solder contacts

Alternate Insert Position (Polarization) w,x, y, z

F80 = crimp contacts terminations.

3100
Wall Mount Receptacle



3101
In Line Receptacle



3102
Box Mount Receptacle



3106
Straight Plug



3108
90° Right Angle Plug



PROTECTIVE METAL CAPS with sash chains

CA121003

To suit receptacles 3100, 3101 and 3102.

	Shell Size
CA121004-1	10 SL
CA121004-2	12 S
CA121004-3	14 S
CA121004-4	16 S
CA121004-5	16
CA121004-6	18
CA121004-7	20
CA121004-8	22
CA121004-9	24
CA121004-10	28
CA121004-11	32
CA121004-12	36



CA121004

To suit cable plugs 3106 and 3108.

	Shell Size
CA121003-1	10 SL
CA121003-2	12 S
CA121003-3	14 S
CA121003-4	16 S
CA121003-5	16
CA121003-6	18
CA121003-7	20
CA121003-8	22
CA121003-9	24
CA121003-10	28
CA121003-11	32
CA121003-12	36

